



VANITIES
BY ELECTRIC MIRROR®

EM

CHLOE™

Dimensions: 36"W x 24"D x 34"H

Materials:

- Countertop: Icy Carrara (QT-1017), Polished
- Metal Finish: Matte Black (BK-05)
- Wood Finish: Red Oak Veneer, 25% sheen

Metal Finish



Matte Black

Wood Finish



Custom

Countertop



Icy Carrara
Quartz



Features & Benefits

- 7.62 cm (3") polished quartz countertop in Icy Carrara (QT-1017), includes 1" high backsplash and left side splash.
- Quartz surfaces are highly resilient, nonporous, and scratch-and stain-resistant.
- Includes a oval undermount vitreous China sink.
- Stainless steel metal accents and front legs finished in Matte Black (BK-05).
- Crafted with 3/4" plywood substrate with red oak veneer.
- Custom stained wood finish applied to a red oak veneer, with a 25% sheen achieved through a multistep finishing process.
- Vanity features a recessed countertop on the front and right side, adding a unique design element.
- Features a removable panel for easy access to plumbing.
- Includes a towel bar for convenience.
- Wall-mounted design with cleat attachment for easy installation.


Manufacturing & Quality Requirements

- All items must be of contract-grade quality, suitable for high-end hospitality use.
- Products must comply with local, state, national, and international codes, including ADA guidelines and fire/life safety regulations.
- Manufacturer must submit certificates of compliance, installation guidelines, maintenance instructions, and warranty documentation.
- All wood must be kiln-dried hardwood, marine-grade plywood, or waterproof MDF.
- Veneers must be A/B grade, with consistent grain and finish.
- All exposed edges must be sealed for moisture resistance.
- Finishes must be commercial-grade catalyzed lacquer, resistant to water, alcohol, and chemical stains.
- Vanities must be impact- and scratch-resistant, with matching finish on all sides and interiors.
- Drawer boxes must feature five-sided dovetail construction. Where plumbing interference exists, a U-shaped configuration should be used to maintain functionality without compromising structural integrity.
- All work must be corner blocked, glued, and reinforced with screws or appropriate mechanical fasteners.
- Use premium undermount soft-close slides and concealed soft-close hinges.
- All metal components and hardware must be made from 304 stainless steel, offering rust and corrosion resistance suitable for most environments. For coastal or high-humidity locations, 316 stainless steel must be used to ensure enhanced durability and protection against salt exposure.
- All exposed hardware finishes must be approved prior to production.
- Leveling glides must be heavy-duty, non-rust nylon, sized and colored to match the base or leg finish.
- Units must be properly packaged to prevent damage or soiling during transit.
- Shipping boxes must be labeled with property name, item number, PO number, and spec number.
- All products must be designed to fit within service elevators, corridors, and doorways. If not, items must be shipped in knock-down state for on-site assembly.
- Manufacturers must submit scaled shop drawings with full details (plans, elevations, sections, materials, finishes, hardware, dimensions).
- Finish samples must be submitted on appropriate substrates for approval prior to production.
- Review time for submittals is 5 business days.
- All substitutions or changes must be approved in writing by the designer.
- Coordinate with general contractor to confirm elevator cab sizes, corridor widths, and mounting heights.
- Manufacturers must ensure products are structurally sound, properly weighted to prevent tipping, and bolted where required (e.g., earthquake zones).

TECHNICAL DRAWINGS

VANITIES
BY ELECTRIC MIRROR®

BK-05: MATTE BLACK
WD-RO: STAINED RED OAK VENEER, 30% SHEEN
QT-1017: ICY CARRARA QUARTZ, POLISHED
SINK: OVAL UNDERMOUNT VITREOUS CHINA (3D MODEL FOR REFERENCE ONLY)
FAUCET: 3-PIECE FAUCET

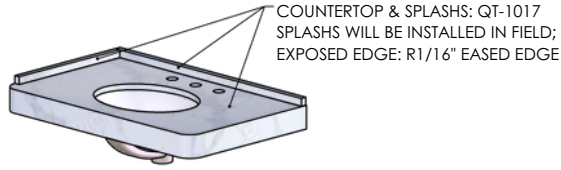

EXPLODED VIEW

