



## EMINENCE™

### PRODUCT DESCRIPTION

The Eminence™ frame-lit vanity mirror has risen to prominence among designers, adding prestige and distinction to every room it graces. Its unique shadow-box frame, inward-facing task lighting, and ambient wall-glow combine to create the perfect balance of form and function.

### SPECIFICATION STATEMENT

Solution shall consist of a lighted mirror with integrated one-touch dimming. LEDs will be mounted in a 90-degree channel in the frame of the mirror, with inward-facing directional lighting on the front face of the mirror and ambient glow behind the mirror. LEDs shall have an L70 life of >54,000 hours, with a greater than or equal to 90 CRI (color rendering index) and will be covered by an integrated diffuser. Product shall incorporate a driver enclosure that is to be mounted to the back of the mirror. Product will have a 10-year limited warranty.

### THE ELECTRIC MIRROR ADVANTAGE

- ✓ Global mirror technology leader for over 25 years
- ✓ More installations than all competitors combined
- ✓ Realistic warranty you can believe in and trust
- ✓ Lowest total cost of ownership
- ✓ U.S.-based customer service support
- ✓ 125,000-square-foot American manufacturing facility

### LIGHTING FEATURES AND BENEFITS

- Superior color rendering (CRI) for more natural, flattering, and softer light quality
- One-touch dimmable inward-facing task lighting for brilliant facial illumination
- One-touch dimmable perimeter wall-glow ambient lighting with diffuser for a finished side view
- Greater illuminance with half the power consumption of traditional LED mirrors


### GENERAL FEATURES AND BENEFITS

- OmegaMirror™ corrosion-resistant, 480-hour CASS-tested proprietary mirror glass
- Environmentally-leading, lead-free, copper-free mirror glass composition
- Sleek and modern profile
- Suitable for damp bathroom environments
- Energy efficient
- Fast lead times
- Easy installation
- 10-year limited warranty
- Patent: [www.electricmirror.com/patents](http://www.electricmirror.com/patents)
- Designed in the USA

### AVAILABLE OPTIONS

- Clock technology <sup>1,2</sup>
- Defogger <sup>1,2</sup>
- CCT: 2,700K / 3,500K / 4,000K / 5,000K <sup>1</sup>
- 0-10V or phase/triac dimming <sup>1</sup>
- 220VAC power <sup>1</sup>
- Custom sizes <sup>1</sup>
- Cord connect <sup>1</sup>

### FINISHES



- Other finishes available <sup>1</sup>


### DEFAULT LIGHTING SPECIFICATIONS

- Natural-looking LED light color
- Front-of-glass illumination: 348 initial lumens/foot
- Wall-glow illumination: 720 initial lumens/foot
- Superior color rendering: 90+ CRI
- Maximum efficacy: 100 lumens/watt
- Color temperature (CCT): 3,000K
- LED L<sub>70</sub> Lifespan (calculated): >54,000-hours
- Built-in EMX™ diffuser

<sup>1</sup> Minimum order quantity required

<sup>2</sup> May not be compatible with all upgrades and options

**DIMENSIONAL DRAWING** (Not to scale.)

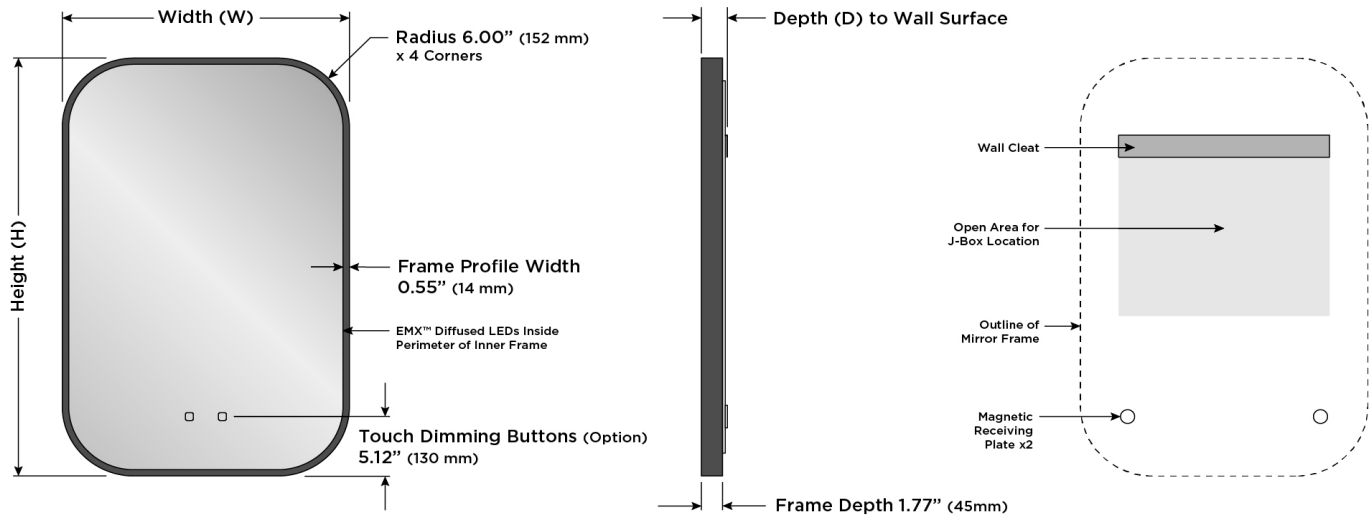

**STANDARD MODELS**

Model Number <sup>1</sup>	Finish	Dimensions <sup>2</sup>	Initial Lumens/ Fixture <sup>3</sup>	LED Power Requirements <sup>3</sup>
EMN3.1-24.00X36.00-BK05-OS2-RC6.0-TD2-WG3-30K	Matte Black (BK-05)	24" W x 36" H x 2.17" D	9,010	120VAC, 82W
EMN3.1-24.00X36.00-BR02-OS2-RC6.0-TD2-WG3-30K	Brushed Brass (BR-02)	(610mm W x 914mm H x 55mm D)		
EMN3.1-30.00X42.00-BK05-OS2-RC6.0-TD2-WG3-30K	Matte Black (BK-05)	30" W x 42" H x 2.17" D	11,143	120VAC, 101W
EMN3.1-30.00X42.00-BR02-OS2-RC6.0-TD2-WG3-30K	Brushed Brass (BR-02)	(762mm W x 1,067mm H x 55mm D)		
EMN3.1-48.00X36.00-BK05-OS2-RC6.0-TD2-WG3-30K	Matte Black (BK-05)	48" W x 36" H x 2.17" D	13,282	120VAC, 121W
EMN3.1-48.00X36.00-BR02-OS2-RC6.0-TD2-WG3-30K	Brushed Brass (BR-02)	(1,219mm W x 914mm H x 55mm D)		

**SAFETY & INSTALLATION SPECIFICATIONS (for Standard Models)**

- Entire assembly meets UL/cUL standards
- International certifications
- Safety-backed mirror
- 120VAC hardwire electrical connection; whip provided with mirror; junction box controlled by a wall switch (by others) is required
- Fixture should be mounted to wall studs; wall cleat provided
- Controlled by non-dimming wall switch (by others) for on/off, and capacitive touch button on fixture for dimming
- Installation wiring may be different on mirrors equipped with additional options
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable

<sup>1</sup> Standard model numbers shown. For assistance specifying additional options, please contact Electric Mirror.

<sup>2</sup> Tolerances for dimensions are ±1/8" (±3mm).

<sup>3</sup> Lumen output and power requirements are calculated based on component specifications and may vary from actual.