

EMINENCE™ FRAME-LIT WARDROBE MIRROR
COMMERCIAL PRODUCT SPECIFIER



S F T W C

EMN3.1 - [] - [] - [] - OS2 - RC6.0 - [] - []

MODEL CODE SIZE FINISH TECHNOLOGY OPTIONS ORIGIN CORNER RADIUS WALL-GLOW CCT

ADDITIONAL NOTES ¹

S MIRROR SIZE

In box S, enter the code for the size of the mirror.

Size (WxH)	Code
Standard Mirror Sizes	
26" x 60"	26.00X60.00
Custom ²	WW.WWXHH.HH



F FRAME FINISH

In box F, enter the code for the metal frame finish.

Finish	Code
Standard Finish Options	
Matte Black (BK-05)	BK05
Other Finishes Available ²	

T TECHNOLOGY OPTIONS

In box T, enter the codes for each option with a hyphen between each one.

Technology Options	Code
Wiring (Hardwire Standard—No Code Needed)	
▪ 135° Offset Grounded Cord+Right-Angle Plug ²	CC2
LED Clock ^{2,3}	
▪ Hardwired, Switched with Lights	COS1
Dimming Technology	
▪ 0-10V Dimming (120VAC)	D1
▪ Touch Dimming	TD2
Defogger	
▪ Standard Defogger ²	DF

Indicates Standard Configuration

¹ Use the additional notes field to specify options not listed.
² Minimum order quantity required.
³ See technology specification sheets for more details.

W WALL-GLOW

In box W, enter the code to add wall-glow ambient lighting behind the mirror.

Wall-Glow	Code
No Wall-Glow ² (Leave Code Blank)	
Wall-Glow Lighting ⁵	WG3

C COLOR TEMPERATURE

In box C, enter the code for the correlated color temperature.

CCT (90+ CRI)	Code
2,700K (90+ CRI) ²	27K
3,000K (90+ CRI)	30K
3,500K (90+ CRI) ²	35K
4,000K (90+ CRI) ²	40K
5,000K (90+ CRI) ²	50K





EMINENCE™

PRODUCT DESCRIPTION

The Eminence™ lighted wardrobe mirror has been embraced by designers for the prestige and distinction it brings to any room it graces. Its unique shadow-box frame, inward-facing task lighting, and ambient wall-glow seamlessly combine to achieve the perfect balance of form and function.

SPECIFICATION STATEMENT

Solution shall consist of a wardrobe-length lighted mirror with LEDs mounted in a 90-degree channel in the frame of the mirror, with inward-facing directional lighting on the front face of the mirror and ambient glow behind the mirror. LEDs shall have an L70 life of >54,000 hours, with a greater than or equal to 90 CRI (color rendering index) and will be covered by an integrated diffuser. Product shall incorporate a driver enclosure that is to be mounted to the back of the mirror. Product will have a 10-year limited warranty.

THE ELECTRIC MIRROR ADVANTAGE

- ✓ Global mirror technology leader for over 25 years
- ✓ More installations than all competitors combined
- ✓ Realistic warranty you can believe in and trust
- ✓ Lowest total cost of ownership
- ✓ U.S.-based customer service support
- ✓ 125,000-square-foot American manufacturing facility

LIGHTING FEATURES AND BENEFITS

- Superior color rendering (CRI) for more natural, flattering, and softer light quality
- Dimmable inward-facing task lighting for brilliant facial illumination—ideal for makeup application and grooming
- Perimeter wall-glow ambient lighting with diffuser for a finished side view
- Greater illuminance with half the power consumption of traditional LED mirrors
- 0-10V dimming

GENERAL FEATURES AND BENEFITS

- OmegaMirror™ corrosion-resistant, 480-hour CASS-tested proprietary mirror glass
- Environmentally-leading, lead-free, copper-free mirror glass composition
- Sleek and modern profile
- Suitable for damp bathroom environments
- Energy efficient
- Fast lead times
- Easy installation
- ADA compliant
- 10-year limited warranty
- Patent: www.electricmirror.com/patents
- Designed in the USA

AVAILABLE OPTIONS

- Clock technology ^{1,2}
- Defogger ^{1,2}
- CCT: 2,700K / 3,500K / 4,000K / 5,000K ¹
- Touch dimming technology ¹
- Custom sizes ¹
- Cord connect ¹

FINISHES

MATTE
BLACK

- Other finishes available ¹


DEFAULT LIGHTING SPECIFICATIONS

- Natural-looking LED light color
- Front-of-glass illumination: 348 initial lumens/foot
- Wall-glow illumination: 720 initial lumens/foot
- Superior color rendering: 90+ CRI
- Maximum efficacy: 98 lumens/watt
- Color temperature (CCT): 3,000K
- LED L₇₀ Lifespan (reported): >54,000-hours
- Built-in EMX™ diffuser

¹ Minimum order quantity required

² May not be compatible with all upgrades and options

DIMENSIONAL DRAWING (Not to scale.)

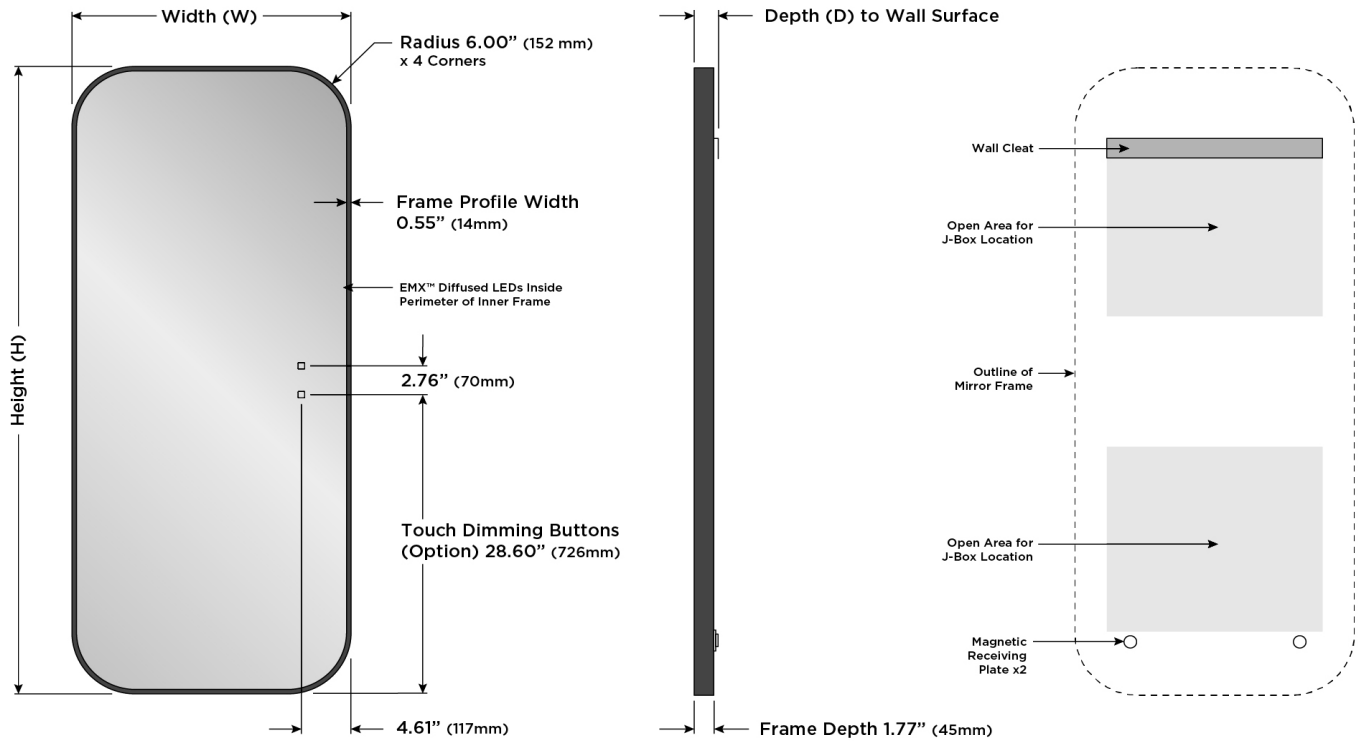

STANDARD MODELS

Model Number ¹	Finish	Dimensions ²	Initial Lumens/ Fixture ³	LED Power Requirements ³
EMN3.1-26.00X60.00-BK05-D1-OS2-RC6.0-WG3-30K	■ Matte Black (BK-05)	26" W x 60" H x 2.17" D (660mm W x 1,524mm H x 55mm D)	13,638	120VAC, 124W

SAFETY & INSTALLATION SPECIFICATIONS (for Standard Models)

- Entire assembly meets UL/cUL standards
- International certifications
- Safety-backed mirror
- 120VAC hardwire electrical connection; whip provided with mirror; junction box controlled by a wall switch (by others) is required
- Fixture should be mounted to wall studs; wall cleat provided
- Controlled by non-dimming wall switch (by others) for on/off, or 0-10V dimming wall switch (by others)
- Installation wiring may be different on mirrors equipped with additional options
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable

¹ Standard model numbers shown. For assistance specifying additional options, please contact Electric Mirror.

² Tolerances for dimensions are ±1/8" (±3mm).

³ Lumen output and power requirements are calculated based on component specifications and may vary from actual.