

## FIFTH AVENUE™

### PRODUCT DESCRIPTION

Your corridors will take on the glamour of Fifth Avenue with this stunning and functional lighted mirror sconce. Featuring a smooth polished edge with two vertical frames of light, this luminaire is a certain hospitality fashion trend-setter.

### SPECIFICATION STATEMENT

Solution shall consist of a lighted mirror sconce with forward-facing lighting and corrosion-resistant glass. Mirror shall have uniform light output in frosted areas, using replaceable LEDs with greater than or equal to 90 CRI (color rendering index). Product will have a 10-year limited warranty.

### THE ELECTRIC MIRROR ADVANTAGE

- ✓ Global mirror technology leader for over 25 years
- ✓ More installations than all competitors combined
- ✓ Realistic warranty you can believe in and trust
- ✓ Lowest total cost of ownership
- ✓ U.S.-based customer service support
- ✓ 125,000-square-foot American manufacturing facility

### FEATURES AND BENEFITS

- OmegaMirror™ corrosion-resistant, 480-hour CASS-tested proprietary mirror glass
- Environmentally-leading, lead-free, copper-free mirror glass composition
- Forward-facing lighting
- Energy efficient
- Fast lead times
- Easy installation
- 10-year limited warranty
- Patent: [www.electricmirror.com/patents](http://www.electricmirror.com/patents)
- Designed in the USA

### AVAILABLE OPTIONS


- Room numbers <sup>1</sup>

### LIGHTING SPECIFICATIONS

- Natural-looking LED light color
- Highest illumination: 516 initial lumens/foot
- Superior color rendering: 90+ CRI
- Maximum efficacy: 96 lumens/watt
- Color temperature (CCT): 3,000K
- LED L<sub>70</sub> Lifespan (calculated): 50,000-hours
- Extended longevity: replaceable LEDs

<sup>1</sup> Minimum order quantity required.

**DIMENSIONAL DRAWING** (Not to scale.)

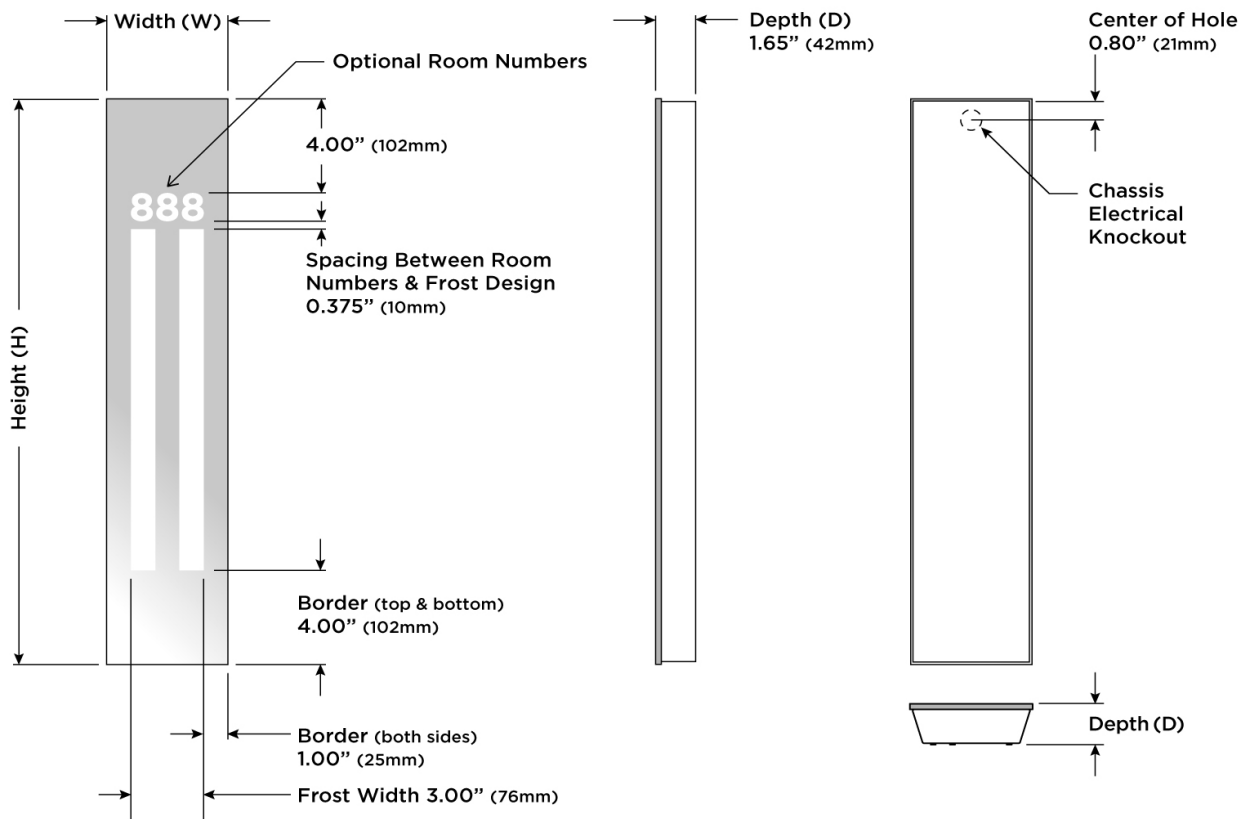

**STANDARD MODELS**

Model Numbers <sup>1</sup>	Dimensions <sup>2</sup>	Initial Lumens/Fixture <sup>3</sup>	LED Power Requirements <sup>3</sup>
SCO2-FIF-5.00x24.00-LSO-OS-30K	5" W x 24" H x 1.65" D (127mm W x 610mm H x 42mm D)	1,461	120VAC, 17W
SCO2-FIF-5.00x42.00-LSO-OS-30K	5" W x 42" H x 1.65" D (127mm W x 1,067mm H x 42mm D)	3,009	120VAC, 34W

**SAFETY & INSTALLATION SPECIFICATIONS (for Standard Models)**

- Entire assembly meets UL/cUL standards
- International certifications
- Safety-backed mirror
- 120VAC hardwire electrical connection; provide 36" whip; junction box not required
- Chassis should be mounted to wall studs; mounting holes are provided
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable

<sup>1</sup> Standard model numbers shown. For assistance specifying additional options, please contact Electric Mirror.

<sup>2</sup> Tolerances for dimensions are ±1/8" (±3mm).

<sup>3</sup> Lumen output and power requirements are calculated based on component specifications and may vary from actual.