

MELROSE™ LIGHTED CORRIDOR SCONCE
COMMERCIAL PRODUCT SPECIFIER

C
S
L
T

SCO2-MEL -
 -
 -
 LSO -
 30K


MODEL CODE
CUSTOMIZATION
SIZE
LED TYPE
COLOR TEMP

ADDITIONAL NOTES ¹

S SIZE

In box S, enter the code for the size of the mirror.

Size (WxH)	Code
Standard Sizes	
5" x 24"	5.00X24.00
5" x 42"	5.00X42.00



C CUSTOMIZATION

In box C, enter the code to add room numbers to the frost area.

Customization	Code
Room Numbers	RN

Indicates Standard Configuration

- ¹ Use the additional notes field to specify options not listed.
- ² Minimum order quantity required.
- ³ See technology specification sheets for more details.
- ⁴ Ava™ and Keen™ are not compatible with other dimming options.
- ⁵ May not be compatible with all upgrades and options.

L LED TYPE

In box L, enter the code for the LED type.


LED Type	Code
Standard Output <small>(516 lumens/ft; 5.76 watts/ft)</small>	LSO

T COLOR TEMPERATURE

In box T, enter the code for the correlated color temperature.

CCT (90+ CRI)	Code
3,000K (90+ CRI)	30K



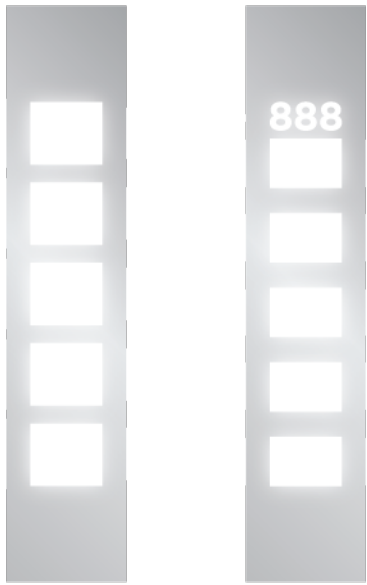

MELROSE™

PRODUCT DESCRIPTION

Adventurous and imaginative, the Melrose™ lighted mirror corridor sconce is as energetic as the district for which it's named. Featuring a smooth, polished edge with a strip of frosted lights, this sconce is both entertaining and illuminating.

SPECIFICATION STATEMENT

Solution shall consist of a lighted mirror sconce with forward-facing lighting and corrosion-resistant glass. Mirror shall have uniform light output in frosted areas, using replaceable LEDs with greater than or equal to 90 CRI (color rendering index). Product will have a 10-year limited warranty.

THE ELECTRIC MIRROR ADVANTAGE

- ✓ Global mirror technology leader for over 25 years
- ✓ More installations than all competitors combined
- ✓ Realistic warranty you can believe in and trust
- ✓ Lowest total cost of ownership
- ✓ U.S.-based customer service support
- ✓ 125,000-square-foot American manufacturing facility

FEATURES AND BENEFITS

- OmegaMirror™ corrosion-resistant, 480-hour CASS-tested proprietary mirror glass
- Environmentally-leading, lead-free, copper-free mirror glass composition
- Forward-facing lighting
- Energy efficient
- Fast lead times
- Easy installation
- 10-year limited warranty
- Patent: www.electricmirror.com/patents
- Designed in the USA

AVAILABLE OPTIONS


- Room numbers ¹

LIGHTING SPECIFICATIONS

- Natural-looking LED light color
- Highest illumination: 516 initial lumens/foot
- Superior color rendering: 90+ CRI
- Maximum efficacy: 96 lumens/watt
- Color temperature (CCT): 3,000K
- LED L₇₀ Lifespan (calculated): 50,000-hours
- Extended longevity: replaceable LEDs

¹ Minimum order quantity required.

DIMENSIONAL DRAWING (Not to scale.)

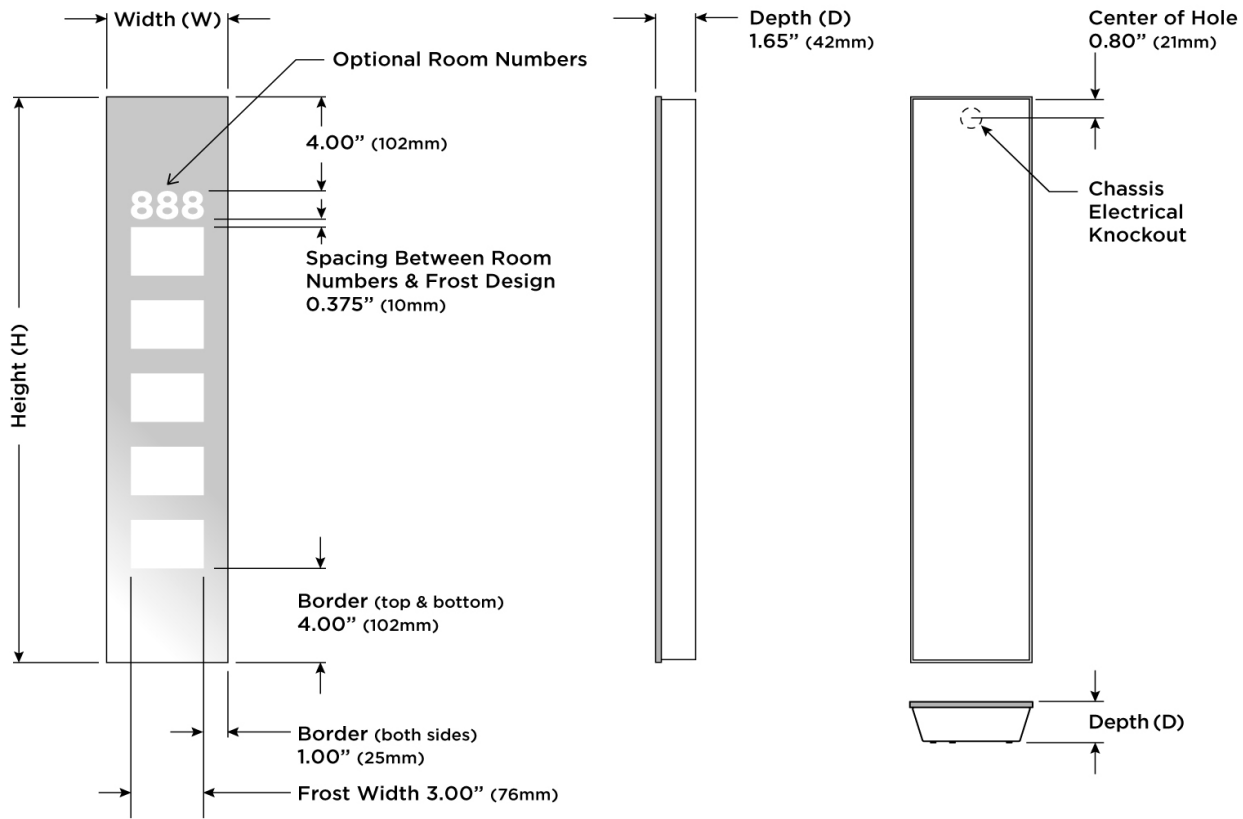

STANDARD MODELS

Model Numbers ¹	Dimensions ²	Initial Lumens/Fixture ³	LED Power Requirements ³
SCO2-MEL-5.00x24.00-LSO-OS-30K	5" W x 24" H x 1.65" D (127mm W x 610mm H x 42mm D)	1,461	120VAC, 17W
SCO2-MEL-5.00x42.00-LSO-OS-30K	5" W x 42" H x 1.65" D (127mm W x 1,067mm H x 42mm D)	3,009	120VAC, 34W

SAFETY & INSTALLATION SPECIFICATIONS (for Standard Models)

- Entire assembly meets UL/cUL standards
- International certifications
- Safety-backed mirror
- 120VAC hardwire electrical connection; provide 36" whip; junction box not required
- Chassis should be mounted to wall studs; mounting holes are provided
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable

¹ Standard model numbers shown. For assistance specifying additional options, please contact Electric Mirror.

² Tolerances for dimensions are ±1/8" (±3mm).

³ Lumen output and power requirements are calculated based on component specifications and may vary from actual.