



RADIANCE™

PRODUCT DESCRIPTION

Unmatched task lighting finds a home in a new slim design to create a spectacular wardrobe-length lighted mirror. Boasting brilliant inward-facing directional lighting and a sublimely sleek look, the Radiance™ lighted wardrobe mirror can serve flawlessly in virtually any room.

SPECIFICATION STATEMENT

Solution shall consist of a lighted wardrobe-length mirror with LEDs mounted in a 45-degree channel in the frame of the mirror, with inward-facing directional lighting on the front face of the mirror. LEDs shall have an L70 calculated life of 140,000 hours, with a greater than or equal to 90 CRI (Color Rendering Index) and will be covered by an integrated diffuser. Product shall incorporate a slim profile surface-mounted driver enclosure. Product will be made in America with U.S. and global components and have a 7-year limited warranty.

THE ELECTRIC MIRROR ADVANTAGE

- ✓ Global mirror technology leader for over 25 years
- ✓ More installations than all competitors combined
- ✓ Realistic warranty you can believe in and trust
- ✓ Lowest total cost of ownership
- ✓ U.S.-based customer service support
- ✓ 125,000-square-foot American manufacturing facility

LIGHTING FEATURES AND BENEFITS

- Superior color rendering (CRI) for more natural, flattering, and softer light quality
- Inward-facing task lighting for brilliant facial illumination—ideal for makeup application and grooming
- Greater illuminance with half the power consumption of traditional LED mirrors


GENERAL FEATURES AND BENEFITS

- OmegaMirror™ corrosion-resistant, 480-hour CASS-tested proprietary mirror glass
- Environmentally-leading, lead-free, copper-free mirror glass composition
- Sleek and modern profile
- Suitable for damp bathroom environments
- Energy efficient
- Fast lead times
- Easy installation
- Title 24 compliant
- JA8-2022 compliant
- 7-year limited warranty
- Patent: www.electricmirror.com/patents
- Made in America with U.S. and global components

AVAILABLE OPTIONS

- Title 24 Compliance ¹
- Keen one-touch energy-saving dimming technology ^{2, 3}
- Seamless LED clock technology ^{2, 3}
- Wall-glow ambient lighting ²
- Defogger ²
- 0-10V, phase/triac, or Dali dimming ^{2, 4}
- 120VAC, 220-240VAC, or 277VAC ⁴ power
- Custom sizes ²

FINISHES



DEFAULT LIGHTING SPECIFICATIONS

- Natural-looking LED light color
- Front-of-glass illumination: 302 initial lumens/foot
- Superior color rendering: 90+ CRI
- Maximum efficacy: 100 lumens/watt
- Color temperature (CCT): 3,000K
- LED L₇₀ Lifespan (calculated): 140,000-hours
- Built-in EMX™ diffusers


¹ Title 24 compliance requires 0-10V or phase/triac dimming

² Minimum order quantity required

³ See technology specification sheets for more details

⁴ May not be compatible with all upgrades and options

DIMENSIONAL DRAWING (Not to scale.)

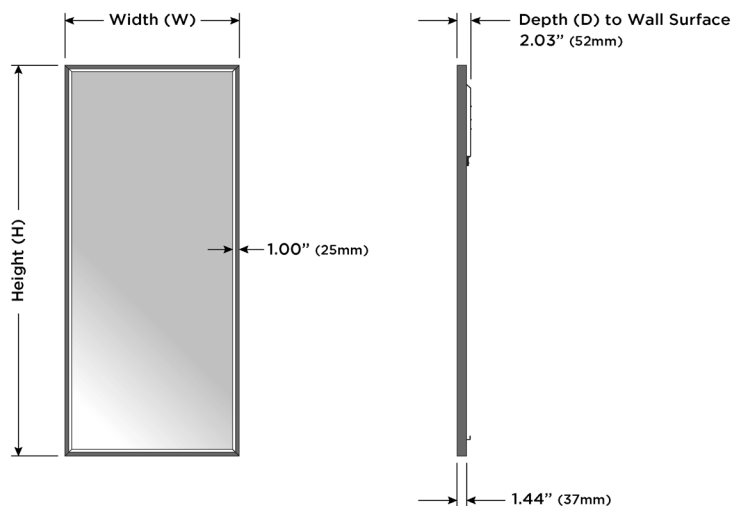

STANDARD MODELS

Model Number ^{1,4}	Finish	Dimensions ²	Initial Lumens/ Fixture ³	LED Power Requirements ³
RAD-2660-BK05	 Matte Black (BK-05)	26" W x 60" H x 2" D	4,276	120 or 277VAC, 51W
RAD-2660-BR02	 Brushed Brass (BR-02)	(660mm W x 1,524mm H x 51mm D)		

SAFETY & INSTALLATION SPECIFICATIONS (for Standard Models)

- Entire assembly meets UL/cUL standards
- International certifications
- Safety-backed mirror
- 120 or 277VAC hardwire electrical connection; direct wire from behind power box or provide whip to reach side knockout; junction box not required
- Power box with integrated wall cleat should be mounted to wall studs; mounting holes are provided
- Controlled by phase/triac dimming wall switch (by others)
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable

¹ Standard model numbers shown. For assistance specifying additional options, please contact Electric Mirror.

² Tolerances for dimensions are $\pm 1/8"$ ($\pm 3\text{mm}$).

³ Lumen output and power requirements are calculated based on component specifications and may vary from actual.

⁴ Specifications and dimensions are subject to change without notice. Electric Mirror reserves the right to change the part number specified based on the latest standards.