





## VANGUARD™

### PRODUCT DESCRIPTION

Vanguard™ stands at the forefront of modern design, with a bold, softened-rectangle silhouette that blends strength and sophistication. Clean lines and gently rounded edges create a timeless presence, while integrated ambient perimeter lighting adds a luminous edge that elevates any contemporary space. A vanity mirror that leads with confidence—Vanguard defines the new standard of style.

### SPECIFICATION STATEMENT

Solution shall consist of a mirror using 480-hour CASS-tested, lead-free, copper-free, corrosion-resistant glass with wall-glow accent lighting around the perimeter, providing uniform light to the walls at all edges of the mirror. The product shall use high-density (44 LEDs/foot), replaceable LED strips with 90+ CRI (Color Rendering Index) and delivering 853 initial lumens/foot with an efficacy of 140 lumens/watt. Product will be made in America with U.S and global components and have a 10-year limited warranty.

### THE ELECTRIC MIRROR ADVANTAGE

- ✓ Global mirror technology leader for over 25 years
- ✓ More installations than all competitors combined
- ✓ Realistic warranty you can believe in and trust
- ✓ Lowest total cost of ownership
- ✓ U.S.-based customer service support
- ✓ 125,000-square-foot American manufacturing facility

### LIGHTING FEATURES AND BENEFITS

- Industry-leading lumen output for better lighting
- Superior color rendering (CRI) for more natural, flattering, and softer light quality
- High-density linear LED design for even light distribution
- High-efficiency LEDs for best-in-class energy savings
- Perimeter wall-glow ambient lighting with diffuser for a finished side view

### GENERAL FEATURES AND BENEFITS

- OmegaMirror™ corrosion-resistant, 480-hour CASS-tested proprietary mirror glass
- Environmentally-leading, lead-free, copper-free mirror glass composition
- Fast lead times
- Easy installation
- ADA compliant
- JA8-2022 compliant
- 10-year limited warranty
- Patent: [www.electricmirror.com/patents](http://www.electricmirror.com/patents)
- Made in America with U.S. and global components

### AVAILABLE OPTIONS

- Title 24 compliance <sup>1</sup>
- [Ava™ touch-tunable white + dimming technology](#) <sup>2,3</sup>
- [Keen™ one-touch energy-saving dimming technology](#) <sup>2,3</sup>
- [Polaris™ wire-free motion sensor nightlight technology](#) <sup>2,3</sup>
- [Seamless™ LED clock technology](#) <sup>2,3</sup>
- [Vive™ streaming audio technology](#) <sup>2,3</sup>
- Defogger <sup>4</sup>
- CCT: 2,700K / 3,000K / 3,500K / 4,000K / 5,000K <sup>2</sup>
- 0-10V, phase/triac, or Dali dimming <sup>2,4</sup>
- 120VAC, 220–240VAC, or 277VAC power <sup>2,4</sup>
- Custom sizes <sup>2</sup>

### DEFAULT LIGHTING SPECIFICATIONS

- Best-in-class illumination: 853 initial lumens/foot
- Superior color rendering: 90+ CRI
- High-density design: 44 LEDs/foot
- High efficacy: 140 lumens/watt
- Color temperature (CCT): 3,000K
- LED L<sub>70</sub> Lifespan (calculated): 52,000-hours
- Extended longevity: replaceable LEDs


<sup>1</sup> Title 24 compliance requires 0-10V or forward-phase/triac dimming.

<sup>2</sup> Minimum order quantity required.

<sup>3</sup> See technology specification sheets for more details.

<sup>4</sup> May not be compatible with all upgrades and options.

**DIMENSIONAL DRAWING** (Not to scale.)

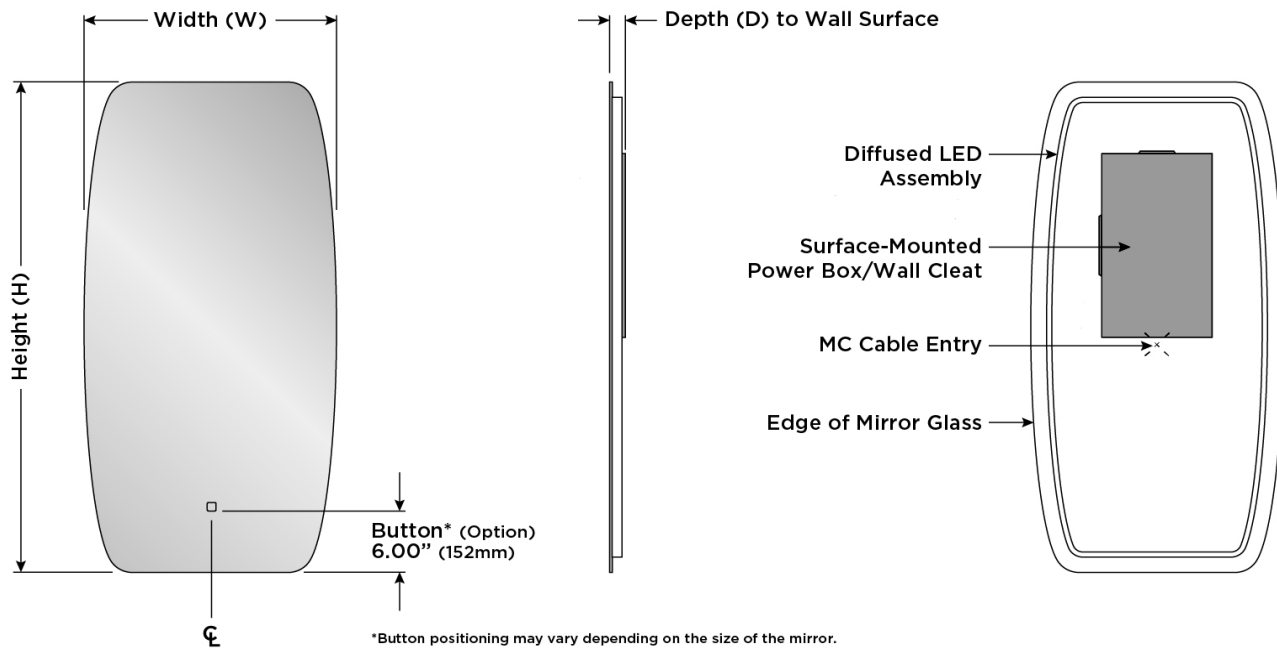

**STANDARD MODELS**

Model Number <sup>1,4</sup>	Dimensions <sup>2</sup>	Initial Lumens/Fixture <sup>3</sup>	LED Power Requirements <sup>3</sup>
VGD4-24.00X48.00-LSERD-30K	24" W x 48" H x 1.63" D (610mm W x 1,219mm H x 41mm D)	8,400	120 or 277VAC, 67W
VGD4-54.00X42.00-LSERD-30K	54" W x 42" H x 1.63" D (1,372mm W x 1,067mm H x 41mm D)	11,822	120 or 277VAC, 94W

**SAFETY & INSTALLATION SPECIFICATIONS (for Standard Models)**

- Entire assembly meets UL/cUL standards
- International certifications
- Safety-backed mirror
- 120 or 277VAC hardwire electrical connection; direct wire from behind power box or provide whip to reach side knockout; junction box not required
- Fixture should be mounted to wall studs; wall cleat provided
- Controlled by non-dimming on/off wall switch (by others)
- Installation wiring may be different on mirrors equipped with additional options
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable

<sup>1</sup> Standard model numbers shown. For assistance specifying additional options, please contact Electric Mirror.

<sup>2</sup> Tolerances for dimensions are ±1/8" (±3mm).

<sup>3</sup> Lumen output and power requirements are calculated based on component specifications and may vary from actual.

<sup>4</sup> Specifications and dimensions are subject to change without notice. Electric Mirror reserves the right to change the part number specified based on the latest standards.