


# VERITY™ VANITY MIRROR

## COMMERCIAL PRODUCT SPECIFIER

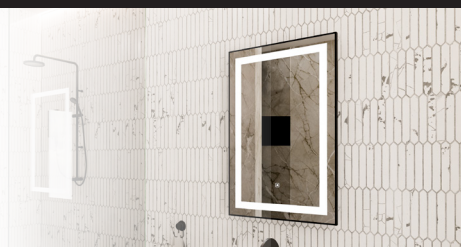

**S**
**F**
**T**
**L**
**V**
**C**

VER2.3  
MODEL CODE

SIZE
FINISH
TECHNOLOGY OPTIONS
LED TYPE
VOLTAGE
COLOR TEMP

ADDITIONAL NOTES <sup>1</sup>

### **S** MIRROR SIZE

In box S, enter the code for the size of the mirror.

| Size (WxH)                   | Code        |
|------------------------------|-------------|
| <b>Standard Mirror Sizes</b> |             |
| 24" x 36"                    | 24.00X36.00 |
| 30" x 42"                    | 30.00X42.00 |
| 36" x 36"                    | 36.00X36.00 |
| 42" x 42"                    | 42.00X42.00 |
| 48" x 36"                    | 48.00X36.00 |
| 54" x 42"                    | 54.00X42.00 |
| 60" x 36"                    | 60.00X36.00 |
| 66" x 42"                    | 66.00X42.00 |
| 72" x 42"                    | 72.00X42.00 |
| Custom <sup>2</sup>          | WW.WWXHH.HH |

### **F** FRAME FINISH

In box F, enter the code for the metal frame finish.

| Finish                                | Code |
|---------------------------------------|------|
| <b>Standard Finish Options</b>        |      |
| Matte Black (BK-05)                   | BK05 |
| Brushed Brass (BR-02)                 | BR02 |
| Oil Rubbed Bronze (BZ-47)             | BZ47 |
| Etched Chrome (CH-04)                 | CH04 |
| Other Finishes Available <sup>2</sup> |      |

### **T** TECHNOLOGY OPTIONS

In box T, enter the codes for each option with a hyphen between each one.

| Technology Options                                                 | Code |
|--------------------------------------------------------------------|------|
| <b>Wiring (Hardwire Standard—No Code Needed)</b>                   |      |
| ▪ 135° Offset Grounded Cord+Right-Angle Plug <sup>5</sup>          | CC2  |
| <b>Seamless™ LED Clock Technology <sup>2, 3</sup></b>              |      |
| ▪ Hardwired Clock, Switched with Lights                            | CK2  |
| <b>Dimming Technology <sup>4</sup></b>                             |      |
| ▪ 0-10V Dimming (120-277VAC) or Phase/Triac Dimming (120-277VAC)   | DM   |
| ▪ Dali Dimming (120-277VAC)                                        | D4   |
| <b>Defogger</b>                                                    |      |
| ▪ Standard Defogger Pad                                            | DF   |
| <b>Keen™ One-Touch Energy-Saving Technology <sup>2, 3, 4</sup></b> |      |
| ▪ 1-Touch, 5-Step Dimming, Off                                     | KC   |
| <b>Ava™ Touch-Tunable White on Mirror <sup>2, 3, 4</sup></b>       |      |
| ▪ 1-Touch, 5 CCT Modes + Dimming                                   | AH   |
| ▪ 1-Touch, 5 CCT Modes + Dim-to-Off + Memory                       | AK   |

☐ Indicates Standard Configuration

<sup>1</sup> Use the additional notes field to specify options not listed.

<sup>2</sup> Minimum order quantity required.

<sup>3</sup> See technology specification sheets for more details.

<sup>4</sup> Keen™ is not compatible with other dimming options.

<sup>5</sup> May not be compatible with all upgrades and options.

### **L** LED TYPE

In box L, enter the code for the LED type.

| LED Type                                                     | Code       |
|--------------------------------------------------------------|------------|
| <b>Standard Output</b><br>(853 lumens/ft; 6.72 watts/ft)     | <b>LSE</b> |
| High Output <sup>5</sup><br>(1,280 lumens/ft; 9.72 watts/ft) | LHE        |

### **V** VOLTAGE

In box V, enter the code for the voltage (code N/A for 120VAC).

| Voltage                                   | Code |
|-------------------------------------------|------|
| <b>120VAC (Standard—Leave Code Blank)</b> |      |
| 220—240VAC                                | 230V |
| 277VAC <sup>5</sup>                       | 277V |

### **C** COLOR TEMPERATURE

In box C, enter the code for the correlated color temperature.

| CCT (90+ CRI)           | Code       |
|-------------------------|------------|
| 2,700K (90+ CRI)        | 27K        |
| <b>3,000K (90+ CRI)</b> | <b>30K</b> |
| 3,500K (90+ CRI)        | 35K        |
| 4,000K (90+ CRI)        | 40K        |
| 5,000K (90+ CRI)        | 50K        |





## VERITY™

### PRODUCT DESCRIPTION

Verity™ exudes refined elegance, combining radiant illumination with a beautifully crafted frame that completes its sophisticated design. Smooth, crisp edges and a luminous inner band of frosted light create a soft, inviting glow, while the surrounding frame adds depth, structure, and a touch of timeless style. Both striking and practical, Verity™ enhances any space with its graceful presence and effortless functionality.

### SPECIFICATION STATEMENT

Solution shall consist of a lighted mirror with forward-facing task lighting and 480-hour CASS-tested, lead-free, copper-free, corrosion-resistant glass. Mirror shall have uniform light output in frosted areas using dimmable, high-density (44 LEDs/foot), replaceable LED strips with 90+ CRI (Color Rendering Index) and delivering 853 initial lumens/foot with an efficacy of 140 lumens/watt. Product will be made in America with U.S. and global components and have a 10-year limited warranty.

### THE ELECTRIC MIRROR ADVANTAGE

- ✓ Global mirror technology leader for over 25 years
- ✓ More installations than all competitors combined
- ✓ Realistic warranty you can believe in and trust
- ✓ Lowest total cost of ownership
- ✓ U.S.-based customer service support
- ✓ 125,000-square-foot American manufacturing facility

### LIGHTING FEATURES AND BENEFITS

- Industry-leading lumen output for better lighting
- Superior color rendering (CRI) for more natural, flattering, and softer light quality
- High-density linear LED design for even light distribution
- High-efficiency LEDs for best-in-class energy savings
- Forward-facing task lighting for ideal makeup application and grooming


### GENERAL FEATURES AND BENEFITS

- OmegaMirror™ corrosion-resistant, 480-hour CASS-tested proprietary mirror glass
- Environmentally-leading, lead-free, copper-free mirror glass composition
- Energy efficient
- Fast lead times
- Easy installation
- JA8-2022 compliant
- 10-year limited warranty
- Patent: [www.electricmirror.com/patents](http://www.electricmirror.com/patents)
- Made in America with U.S. and global components

### AVAILABLE OPTIONS

- Title 24 Compliance <sup>1</sup>
- [Ava™ touch-tunable white + dimming technology](#)<sup>2, 3</sup>
- [Keen one-touch energy-saving dimming technology](#)<sup>2, 3</sup>
- [Polaris™ wire-free motion sensor nightlight technology](#)<sup>2, 3</sup>
- [Seamless LED clock technology](#)<sup>2, 3</sup>
- [Vive™ streaming audio technology](#)<sup>2, 3</sup>
- Defogger <sup>2</sup>
- CCT: 2,700K / 3,000K / 3,500K / 4,000K / 5,000K
- 0-10V, phase/triac, or Dali dimming <sup>2, 4</sup>
- 120VAC, 220-240VAC, or 277VAC <sup>4</sup> power
- Custom sizes <sup>2</sup>

### FINISHES



### DEFAULT LIGHTING SPECIFICATIONS

- Best-in-class illumination: 853 initial lumens/foot
- Superior color rendering: 90+ CRI
- High-density design: 44 LEDs/foot
- Maximum efficacy: 140 lumens/watt
- Color temperature (CCT): 3,000K
- LED L<sub>70</sub> Lifespan (calculated): 52,000-hours
- Extended longevity: replaceable LEDs


<sup>1</sup> Title 24 compliance requires 0-10V or phase/triac dimming

<sup>2</sup> Minimum order quantity required

<sup>3</sup> See technology specification sheets for more details

<sup>4</sup> May not be compatible with all upgrades and options

**DIMENSIONAL DRAWING** (Not to scale.)

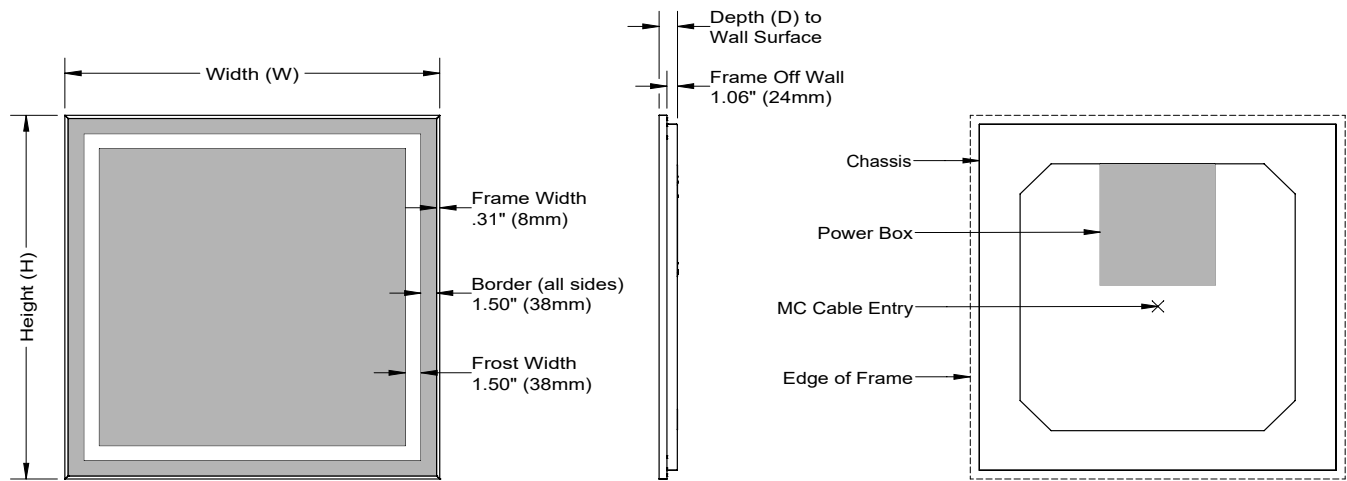

**SAFETY & INSTALLATION SPECIFICATIONS (for Standard Models)**

- Entire assembly meets UL/cUL standards
- International certifications
- Safety-backed mirror
- 120-240VAC hardwire electrical connection; provide 36" whip; junction box not required
- Chassis should be mounted to wall studs; mounting holes are provided
- Controlled by non-dimming on/off wall switch (by others)
- Installation wiring may be different on mirrors equipped with additional options
- Fixture can only be hung in the WxH orientation as shown; fixture is not field-interchangeable

<sup>1</sup> Standard model numbers shown. For assistance specifying additional options, please contact Electric Mirror.

<sup>2</sup> Tolerances for dimensions are  $\pm 1/8"$  ( $\pm 3\text{mm}$ ).

<sup>3</sup> Lumen output and power requirements are calculated based on component specifications and may vary from actual.

<sup>4</sup> Specifications and dimensions are subject to change without notice. Electric Mirror reserves the right to change the part number specified based on the latest standards.

## STANDARD MODELS

| Model Number <sup>1,4</sup>       | Finish                                                                                                        | Dimensions <sup>2</sup>                                     | Initial Lumens/<br>Fixture <sup>3</sup> | LED Power<br>Requirements<br><sup>3</sup> |
|-----------------------------------|---------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------|-----------------------------------------|-------------------------------------------|
| VER2.3-EBBK05-24.00X36.00-LSE-30K |  Matte Black (BK-05)         | 24" W x 36" H x 1.75" D<br>(610mm W x 914mm H x 44mm D)     | 7,965                                   | 120-240VAC,<br>63W                        |
| VER2.3-EBBR02-24.00X36.00-LSE-30K |  Brushed Brass (BR-02)       |                                                             |                                         |                                           |
| VER2.3-EBBZ47-24.00X36.00-LSE-30K |  Oil Rubbed Bronze (BZ-47)   |                                                             |                                         |                                           |
| VER2.3-EBCH04-24.00X36.00-LSE-30K |  Etched Chrome (CH-04)       |                                                             |                                         |                                           |
| VER2.3-EBBK05-30.00X42.00-LSE-30K |  Matte Black (BK-05)         | 30" W x 42" H x 1.75" D<br>(762mm W x 1,067mm H x 44mm D)   | 9,799                                   | 120-240VAC,<br>77W                        |
| VER2.3-EBBR02-30.00X42.00-LSE-30K |  Brushed Brass (BR-02)       |                                                             |                                         |                                           |
| VER2.3-EBBZ47-30.00X42.00-LSE-30K |  Oil Rubbed Bronze (BZ-47)   |                                                             |                                         |                                           |
| VER2.3-EBCH04-30.00X42.00-LSE-30K |  Etched Chrome (CH-04)       |                                                             |                                         |                                           |
| VER2.3-EBBK05-36.00X36.00-LSE-30K |  Matte Black (BK-05)         | 36" W x 36" H x 1.75" D<br>(914mm W x 914mm H x 44mm D)     | 9,672                                   | 120-240VAC,<br>77W                        |
| VER2.3-EBBR02-36.00X36.00-LSE-30K |  Brushed Brass (BR-02)       |                                                             |                                         |                                           |
| VER2.3-EBBZ47-36.00X36.00-LSE-30K |  Oil Rubbed Bronze (BZ-47)   |                                                             |                                         |                                           |
| VER2.3-EBCH04-36.00X36.00-LSE-30K |  Etched Chrome (CH-04)       |                                                             |                                         |                                           |
| VER2.3-EBBK05-42.00X42.00-LSE-30K |  Matte Black (BK-05)         | 42" W x 42" H x 1.75" D<br>(1,067mm W x 1,067mm H x 44mm D) | 11,510                                  | 120-240VAC,<br>91W                        |
| VER2.3-EBBR02-42.00X42.00-LSE-30K |  Brushed Brass (BR-02)       |                                                             |                                         |                                           |
| VER2.3-EBBZ47-42.00X42.00-LSE-30K |  Oil Rubbed Bronze (BZ-47) |                                                             |                                         |                                           |
| VER2.3-EBCH04-42.00X42.00-LSE-30K |  Etched Chrome (CH-04)     |                                                             |                                         |                                           |
| VER2.3-EBBK05-48.00X36.00-LSE-30K |  Matte Black (BK-05)       | 48" W x 36" H x 1.75" D<br>(1,219mm W x 914mm H x 44mm D)   | 11,510                                  | 120-240VAC,<br>91W                        |
| VER2.3-EBBR02-48.00X36.00-LSE-30K |  Brushed Brass (BR-02)     |                                                             |                                         |                                           |
| VER2.3-EBBZ47-48.00X36.00-LSE-30K |  Oil Rubbed Bronze (BZ-47) |                                                             |                                         |                                           |
| VER2.3-EBCH04-48.00X36.00-LSE-30K |  Etched Chrome (CH-04)     |                                                             |                                         |                                           |
| VER2.3-EBBK05-54.00X42.00-LSE-30K |  Matte Black (BK-05)       | 54" W x 42" H x 1.75" D<br>(1,372mm W x 1,067mm H x 44mm D) | 13,221                                  | 120-240VAC,<br>104W                       |
| VER2.3-EBBR02-54.00X42.00-LSE-30K |  Brushed Brass (BR-02)     |                                                             |                                         |                                           |
| VER2.3-EBBZ47-54.00X42.00-LSE-30K |  Oil Rubbed Bronze (BZ-47) |                                                             |                                         |                                           |
| VER2.3-EBCH04-54.00X42.00-LSE-30K |  Etched Chrome (CH-04)     |                                                             |                                         |                                           |
| VER2.3-EBBK05-60.00X36.00-LSE-30K |  Matte Black (BK-05)       | 60" W x 36" H x 1.75" D<br>(1,524mm W x 914mm H x 44mm D)   | 13,221                                  | 120-240VAC,<br>104W                       |
| VER2.3-EBBR02-60.00X36.00-LSE-30K |  Brushed Brass (BR-02)     |                                                             |                                         |                                           |
| VER2.3-EBBZ47-60.00X36.00-LSE-30K |  Oil Rubbed Bronze (BZ-47) |                                                             |                                         |                                           |
| VER2.3-EBCH04-60.00X36.00-LSE-30K |  Etched Chrome (CH-04)     |                                                             |                                         |                                           |
| VER2.3-EBBK05-66.00X42.00-LSE-30K |  Matte Black (BK-05)       | 66" W x 42" H x 1.75" D<br>(1,677mm W x 1,067mm H x 44mm D) | 14,932                                  | 120-240VAC,<br>118W                       |
| VER2.3-EBBR02-66.00X42.00-LSE-30K |  Brushed Brass (BR-02)     |                                                             |                                         |                                           |
| VER2.3-EBBZ47-66.00X42.00-LSE-30K |  Oil Rubbed Bronze (BZ-47) |                                                             |                                         |                                           |
| VER2.3-EBCH04-66.00X42.00-LSE-30K |  Etched Chrome (CH-04)     |                                                             |                                         |                                           |
| VER2.3-EBBK05-72.00X42.00-LSE-30K |  Matte Black (BK-05)       | 72" W x 42" H x 1.75" D<br>(1,829mm W x 1,067mm H x 44mm D) | 15,865                                  | 120-240VAC,<br>125W                       |
| VER2.3-EBBR02-72.00X42.00-LSE-30K |  Brushed Brass (BR-02)     |                                                             |                                         |                                           |
| VER2.3-EBBZ47-72.00X42.00-LSE-30K |  Oil Rubbed Bronze (BZ-47) |                                                             |                                         |                                           |
| VER2.3-EBCH04-72.00X42.00-LSE-30K |  Etched Chrome (CH-04)     |                                                             |                                         |                                           |